




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>H04B 7/005, H04L 25/03</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/25442</b> <b>(43) International Publication Date:</b> 4 May 2000 (04.05.00)
<b>(21) International Application Number:</b> PCT/EP98/06992 <b>(22) International Filing Date:</b> 26 October 1998 (26.10.98) <b>(71) Applicant (for all designated States except US):</b> NOKIA NETWORKS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> ZHENGDI, Qin [FI/FI]; Kurjenpolvi 22, FIN-90580 Oulu (FI). <b>(74) Agents:</b> DRIVER, Virginia, Rozanne et al.; Page White & Farrer, 54 Doughty Street, London WC1N 2LS (GB).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>

**(54) Title:** CHANNEL ESTIMATION IN A CELLULAR COMMUNICATION SYSTEM

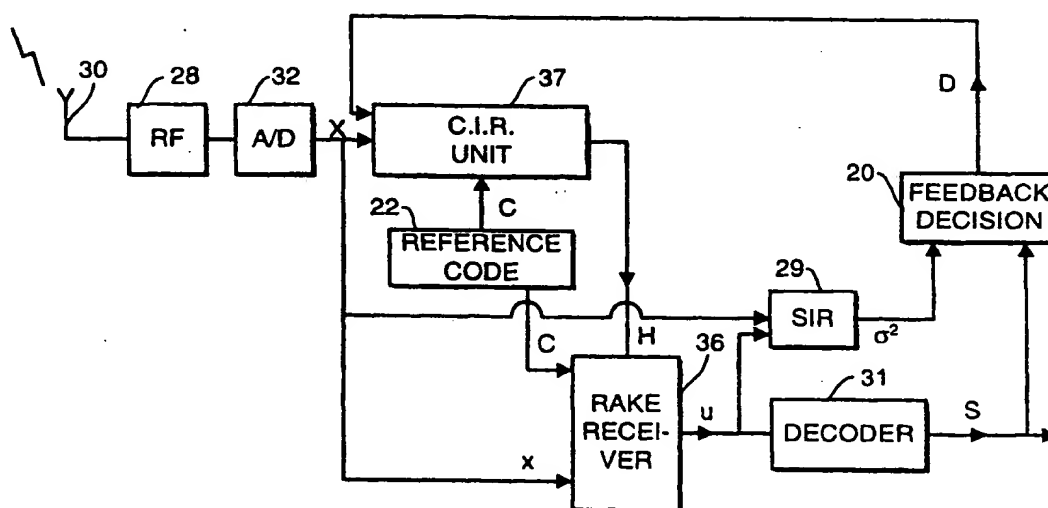

**(57) Abstract**

A method of channel estimation in a cellular communication system is described. Symbols are transmitted between a mobile station and a base station. According to the described method, an incoming signal is received via a communication channel. A first estimate for the channel impulse response of that communication channel is provided and used to process the incoming signal to generate an estimated data symbol. The estimated data symbol is used to generate a soft output feedback decision which is then used to make a further estimate of the channel impulse response. According to a variation, the further estimate of channel impulse response is made by performing a correlation process between a conjugate version of a spreading code used to spread the incoming signal and the incoming signal itself. The results of that process are multiplied by a feedback decision.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

CHANNEL ESTIMATION IN A CELLULAR COMMUNICATION SYSTEM

The present invention relates to a method and circuitry for channel estimation in a cellular communication system.

The invention is particularly concerned with a cellular communication system in which data is transmitted as a plurality of data symbols over a sequence of time slots. As is known, in a CDMA system, data is encoded for transmission by modulating data symbols to be transmitted by a unique spreading code for each of a plurality of communication channels. Within each cell of a cellular communication system, spreading codes allow for a plurality of different mobile stations to communicate with a base station on selectively coded channels.

When a signal is transmitted between a base station and a mobile station (either on the uplink or the downlink), the signal receiving unit needs to establish from the signal which it has received some information about the communication path along which the signal has travelled. This is referred to herein as "channel estimation" and is carried out in a channel estimation unit which generates a channel impulse response. Various techniques are known for channel estimation. The channel impulse response is required in order to properly decode and demodulate incoming data.

In an earlier proposed CDMA system explained in the Technical Report of IEICE (1996 - 02) entitled "Variable Rate Data Transmission on Single Code Channels in DS/CDMA" by Okomura et al, data is transmitted at variable transmission rates. Channel estimation is carried out from pilot symbols spaced periodically in the data stream.

One difficulty associated with this proposal is that only the energy from the pilot symbols is available for channel estimation, and the signal to noise ratio of pilot symbols tends to be poor. Thus, filtering is required to get more reliable

estimates. In particular, in the case of mobile stations moving at high speeds, it may be difficult to apply a suitable filtering technique due to short channel coherence time.

It is therefore advantageous to use data symbols in addition to the pilot symbols for channel estimation. The present invention seeks to provide a technique for improving channel estimation using estimated data symbols.

According to one aspect of the invention there is provided a method of channel estimation in a cellular communication system in which symbols are transmitted between a mobile station and a base station, the method comprising:

- receiving via a communication channel an incoming signal;
- providing a first estimate for the channel impulse response of that communication channel and utilising that first estimate to process the incoming signal to generate an estimated data symbol;

- using said estimated data symbol to generate a soft output feedback decision; and

- using the soft output feedback decision to make a further estimate of the channel impulse response.

The invention is particularly but not exclusively applicable to a CDMA system in which the incoming signal incorporates symbols spread by a spreading code.

According to another aspect of the invention there is provided a method of channel estimation in a cellular communication system in which symbols are transmitted between a mobile station and a base station, the method comprising:

- receiving via a communication channel an incoming signal which incorporates symbols spread by a spreading code;

- providing a first estimate for the channel impulse response of that communication channel and utilising that first estimate to process the incoming signal to generate an estimated data symbol;

making a further estimate of the channel impulse response by performing a correlation process between a conjugate version of the spreading code and the incoming signal, and multiplying the results of that process by a feedback decision based on said estimated data symbol as a weighting value for the further estimate of the channel impulse response.

The incoming signal can include data symbols and pilot symbols, with a unique spreading code having been used respectively for pilot symbols and data symbols.

According to the further aspect of the invention, the feedback decision may be a soft output or a hard output.

A further aspect of the invention provides circuitry for estimating a channel impulse response in a cellular communication system in which symbols are transmitted between a mobile station and a base station, the circuitry comprising:

- a receiver for receiving via a communication channel an incoming signal which incorporates symbols spread by a spreading code;

- a channel impulse response generator for providing a first estimate for the channel impulse response of that communication channel;

- a data symbol generator for generating an estimated data symbol using the first estimate of the channel impulse response;

- circuitry for providing a further estimate of the channel impulse response by performing a correlation process between a conjugate version of the spreading code and the incoming signal, and multiplying the results of that process by a feedback decision based on said estimated data symbol as a weighting value for the further estimate of the channel impulse response.

A still further aspect of the present invention provides circuitry for estimating a channel in a cellular communication system in which symbols are transmitted between a mobile station and a base station, the circuitry comprising:

a receiver for receiving an incoming signal via a communication channel;

a channel impulse response generator for providing a first estimate for the channel impulse response of that communication channel;

a data symbols generator for generating an estimated data symbol using that first estimate;

a soft output feedback decision generator for using said estimated data symbol to generate a soft output feedback decision;

wherein the soft output feedback decision is used to make a further estimate of the channel impulse response.

The invention also contemplates a base station and/or a mobile station incorporating circuitry according to the first aspects of the invention.

For a better understanding of the present invention and to show how the same may be carried into effect, reference will now be made by way of example to the accompanying drawings in which:

Figure 1 is a block diagram illustrating schematically symbol estimation in a basic CDMA system;

Figure 2 is a block diagram illustrating a cellular communication system;

Figure 3 is a diagram illustrating a transmission time slot structure;

Figure 4 is a block diagram illustrating channel estimation with feedback;

Figure 5 is a block diagram of circuitry in a channel impulse response unit;

Figure 6 is a vector space diagram; and

Figures 7 and 8 are simulations of acquisition probability against signal energy per bit to noise ratio.

Figure 1 is a block diagram of a basic receiving system in a CDMA cellular communication network. Figure 2 is a block diagram

illustrating a context in which the present invention may be used. That is, a CDMA mobile communication system allows a plurality of mobile stations MS1, MS2, MS3 to communicate with a base station BTS in a common cell via RF signals on respective channels CH1, CH2, CH3. These channels are distinguished from one another by the use of spreading codes in a manner which is known per se.

Reverting now to Figure 1, signals incoming at an antenna 30 are received by an RF unit 28 and supplied to an analogue-to-digital (A/D) converter 32. The A/D converter takes samples of the incoming signals at intervals  $i$  to generate digital sampled values  $x$ . It will readily be understood that a signal may arrive at the receiving circuitry having experienced multi-paths with differing propagation delays. Each digital sampled value  $x_i$  may include therefore components of a number of different symbols depending on the multipath effect.

The digital signal is supplied from the A/D converter 32 to a channel impulse response unit 37 which provides an estimated channel impulse response  $H$  for use in processing the incoming signal. A reference code generator 22 supplies a reference code for despreading the incoming signal both to the channel impulse response unit 37 and to a rake receiver 36. The reference code is denoted  $C$  and is the unique spreading code for the communication channel on which the signal is received. Thus, it matches the code which was used to spread the signal prior to transmission at the base station or mobile station respectively. Although Figure 1 illustrates circuitry located at each mobile station, similar circuitry may also be utilised at a base station.

The rake receiver 36 additionally receives the input digital signal  $x$  and the estimated channel impulse response  $H$ . It generates an estimated transmitted signal  $u$  which is supplied to a decoder 31. The decoder estimates symbol values  $s$  from the estimated signal  $u$  which has been derived from the actual

incoming signal  $x$ , in a manner which is known per se.

Operation of the rake receiver is known to a person skilled in the art but in any event is described in more detail in Application WO96/24988 in the name of Nokia Mobile Phones Limited.

The form in which data is transmitted is illustrated by way of example in Figure 3. The data symbols are transmitted in a sequence of time slots, each time slot including pilot symbols (PS) and coded data. Data is transmitted as a set of analogue symbols which are produced from originating digital data by  $i, q$  modulation. In a CDMA system the symbols are spread by a spreading code prior to transmission. In a typical system, each time slot has a duration of .625ms. The pilot symbols are introduced at the beginning and end of each time slot in a coherent system. These symbols are readily recognisable and so the beginning and end of each time slot can be identified for synchronisation purposes. In the circuit of Figure 1, the pilot symbols are additionally identified and used in the estimation of the channel impulse response by the channel impulse response 37.

Figure 4 illustrates an improved version of the circuitry of Figure 1. In Figure 4, the estimated symbol  $s$  is fed back to the channel impulse response unit 37 via a feedback decision generator 20 which generates a feedback decision  $D$  from the estimated symbol  $s$ . That feedback decision  $D$  is used to improve the estimate of channel impulse response generated by the CIR unit 37. An SIR block 29 receives the incoming signal samples  $x$  and the estimated signal  $u$  and calculates the signal to information ratio used to generate noise variance  $\sigma^2$  for the feedback decision generator 20.

Figure 5 illustrates how the feedback decision  $D$  is used to improve the estimated channel impulse response. Figure 5 illustrates a CIR unit 37 which is capable of providing an



estimated channel impulse response  $H$  using both feedback estimated data symbols and incoming pilot symbols. The circuit comprises first and second matched filters 10,12 which are each used to apply the relevant despreading code to the incoming digital signal  $x_{in}$ . The reference code generator 22 generates three codes. A spreading long code  $LC$  is applied to both of the match filters 10,12. A spreading short code  $W_p$  for pilot symbols is applied only to the first match filter 10 and a spreading short code  $W_d$  for data is applied only to the second match filter 12. The output signals 14,16 from the first and second match filters 10,12 respectively are applied to an averaging circuit 18. The averaging circuit receives the decision feedback  $D$  and applies that to the signals 14,16 from the matched filters to generate the estimated impulse response  $H$ .

The averaging circuit 18 includes a memory 40 for holding previous channel impulse responses and a weighting/averaging unit 42 for taking an average of the earlier channel impulse responses and applying a weighting function according to the feedback decision value  $D$ .

The correlation process which is used to establish the estimate of channel impulse response can be expressed as:

$$H_n(t) = \sum_i D_n \cdot C^*(i) x(i+t) = D_n \sum_i C^*(i) x(i+t) \quad (\text{Equation 1})$$

In the above equation,  $i$  is the sampling time index along the received signal,  $t$  is the resulting sampling time index of the correlation process,  $x(i+t)$  is the received data sample for that index,  $C^*$  is the conjugate of the spreading code and  $D_n$  is the  $n_{th}$  decision feedback where  $n$  is the time index of the impulse response. It will be apparent that the decision feedback  $D$  may be in respect of pilot symbols and/or data symbols.

In use, an initial estimate for the channel impulse response  $H$  would be established by the CIR unit 37 on the basis only of known incoming pilot symbols in a particular time slot in a

manner which is known per se. Alternatively, an initial estimate can be made using Equation (1) without the weighting function D. Once a preliminary estimate of the channel impulse response has been established, this is held in the memory 40 and supplied to the rake receiver 36 for subsequent signal processing of data symbols in that time slot. The first data symbol to be estimated is then subject to feedback to provide a feedback decision D so that a new estimate for the channel impulse response H can be determined using the procedure outlined above and as illustrated in Figure 5. The spreading code conjugate  $C^*$  in equation 1 is derived from merging the conjugates of  $W_d$  and LC (for data) or  $W_p$  and LC (for pilot symbols). Then, an average is taken of the new estimate and the preliminary estimate. Thus, at each estimated symbol an improved channel impulse response is obtained for subsequent processing. The average can be taken coherently within any coherent period, that is part of a slot, one whole slot or a multiple of slots. Alternatively, a non-coherent average can be taken over any period.

It will be apparent from Equation 1 that the correlation process can effectively be implemented without decision feedback as if all the transmitted data symbols are ones. The transmission feedback D acts as an average weighting factor to determine the estimated channel impulse response H.

Another aspect of the implementation discussed herein is to determine the nature of the decision feedback D generated by the feedback decision generator 20. Figure 6 illustrates the theory underlying one proposal which is to utilise a soft symbol decision feedback (SDFB) process by generating a soft feedback decision value D. Figure 6 illustrates a vector diagram of signal space. Vector A is a transmitted data signal. Vector A' is the received data. Vector A is the actual value we expect from the transmitted data signal since the rake receiver cannot be perfect. The received data symbol can be written as:

$$A' = a + n$$

(Equation 2)

where  $n$  is the noise vector.

It is natural to assume that both the signal and the noise are zero mean. We have:

$$\begin{aligned} E\{a\} &= 0 \\ E\{n\} &= 0 \\ E\{A'\} &= E\{a+n\} = 0 \end{aligned} \quad (\text{Equation 3})$$

In a binary (+1/-1) environment, we have also:

$$\begin{aligned} E\{AA^*\} &= 1 \\ E\{A'A'^*\} &= E\{(a+n)(a+n)^*\} \\ &= E\{a a^*\} + E\{nn^*\} \\ &= E\{a a^*\} + \sigma^2 \end{aligned} \quad (\text{Equation 4})$$

where  $\sigma^2$  is the noise variance.

With these statistics of the signal, the soft output can be adjusted to satisfy the conditions for feedback if the noise variance is known beforehand. For a simple solution, we suppose that the signal loss is minimum and can be neglected:

$$|a-A| \rightarrow 0$$

Then equation (3) becomes:

$$\begin{aligned} E\{A'A'^*\} &= E\{a a^*\} + \sigma^2 \\ &= E\{A A^*\} + \sigma^2 \\ &= 1 + \sigma^2 \end{aligned} \quad (\text{Equation 5})$$

Using this analysis, the feedback decision generator can generate a soft value  $D$  satisfying the following requirements:

$$E\{D\} = 0 \quad (\text{Equation 6})$$

$$E\{DD^*\} = 1 + \sigma^2 \quad (\text{Equation 7})$$

As an alternative, a hard decision feedback may be utilised by performing a binary cut-off, that is to provide either +1 or -1 to the input of the channel impulse response unit for each estimated symbol  $S$ .

The effectiveness of both solutions is illustrated in Figures 7 and 8. In figures 7 and 8, the x axis represents signal energy per bit to noise ratio ( $E_b/N_0$ ) and the y axis represents the scale of acquisition probability - that is the likelihood that all signal propagation paths have been captured in the received signal as estimated using the C.I.R. Figure 7 is the simulation results with the best possible channel estimation, and Figure 8 is the simulation results in which the channel information of a slot is obtained only from the pilot symbols in the same slot. These simulations have been generated based on the MATLAB program included as Annexe 1. The simulation results compare the acquisition probabilities of the impulse response of different approaches of the decision feedback compared with no decision feedback. In both cases, it can be seen that the best results are given by a soft decision feedback for both pilot and data symbols. This is the top line in both simulations. The next line is for soft feedback decisions relating only to data symbols, that is without pilot symbol feedback being taken into account.

The next line is for hard data feedback decisions in respect of data symbols only.

The lowest line is where there is no decision feedback.

ANNEXE 1**MATLAB program**

```

% Soft Decision Feedback
% ARIB specification
% QZD/NTC - FEB.98 - Oulu
clear, rand('seed',0), randn('seed',0)
Dat_Weight = 0.5; SNR = -30:3:0; Fingers = 10;
h=[0.7+j*0.1,0,0,0,-0.5-j*0.3,0,0,0,0.3+j*0.5,0,0, ...
    0.1-j*0.13,0,0,0,0,0,0.3-j*0.1,0,0,0,0.5+j*0.5, ...
    0,0,0,-0.5-j*0.3,0,0,0,0.3+j*0.5,0,0,0.1-j*0.13,...
    0,0,0,0,0,0,0.3-j*0.1];
h=h/sqrt(h*h');
AcqError = zeros(size(SNR,2), 4);
for kkk = 1:size(SNR,2)
    snr = SNR(kkk) % SNR in dB
    for nnn=1:1000
        DAT = (rand(1,40)>0.5)*2-1;
        % CODE
        CL_I=(rand(1,2560)>0.5)*2-1; CL_Q=(rand(1,2560)>0.5)*2-1;
        C = CL_I + j*CL_Q;
        w=1;for k=1:6;w=[w w;w -w];end;w0=w(1,:);w1=w(2,:);clear w;
        W0=[];W1=[]; for k=1:40, W0=[W0,w0];W1=[W1,w1];end
        C0 = w0 .*C; C1 = W1 .*C;
        % Spreading
        D=[]; for k=1:40, D=[D,DAT(k)*w1];end % Data
        P=ones(size(D)); % PILOT
        x1 = (D + j*P) .* C;
        % Channel
        x2 = conv(x1,h)/2;
        % Noise
        nA=1/10^(snr/20);fork=1:size(x2,2);n(k)=nA*randn*exp(j*rand*2*pi);end
        x = x2 + n;
        %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%% MF %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
        IRPilot = zeros(39, 64); IRData = zeros(39, 64);
        for k=1:39, l=(k-1)*64;
            for m = 1:64
                IRPilot(k,m) = IRPilot(k,m) + x(1+m-1+(1:64))*C0(1+(1:64))';
                IRData(k,m) = IRData(k,m) + x(1+m-1+(1:64))*C1(1+(1:64))';
            end
        end
        IRPilot = -j*IRPilot/64;
        IRPilotHard=sum(IRPilot(1:28,:))/28;
        IRData = IRData/64;
        %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%% H' %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
        a = IRPilotHard .* conj(IRPilotHard);
        H = zeros(size(h));
        for k = 1:Fingers, findf = 0;
            while( findf < 1)
                [n,m]=max(a); a(m)=0;
                if (m<=size(h,2)), H(m)=IRPilotHard(m); findf=2; end
            end
        end
        %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%% decision %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
        h1=find(abs(h)>0.01);
        h2=h1; % Idea
        %h2=find(abs(H)>0.01); % blind
        PilotSoft = zeros(1,28); DataSoft = zeros(1,40);
        for n=1:Fingers
            a = x(h2(n):size(C0,2)+h2(n)-1) .* conj(C0) * conj(H(h2(n)));

```

```

    for k=1:28
        PilotSoft(k) = PilotSoft(k) + imag(sum(a((k-1)*64+1:k*64)));
    end
    a = x(h2(n):size(C1,2)+h2(n)-1) .* conj(C1) * conj(H(h2(n)));
    for k=1:40
        DataSoft(k) = DataSoft(k) + real(sum(a((k-1)*64+1:k*64)));
    end
end
PilotSoft = PilotSoft/64;
DataSoft = DataSoft/64;
DataHard = sign(DataSoft);
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%% Averaging %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
a = 0; b = 0; c = 0;
IRHard=zeros(1,64); IRSOFT=zeros(1,64); IRSOFTp=zeros(1,64);
IRSOFTer=zeros(1,64); IRSOFTerp=zeros(1,64);
for k=1:39
    IRHard=IRHard+IRData(k,:)*DataHard(k); a=a+abs(DataHard(k));
    IRSOFT=IRSOFT+IRData(k,:)*DataSoft(k); b=b+abs(DataSoft(k));
end
for k=1:28
    IRSOFTp=IRSOFTp+IRPilot(k,:)*PilotSoft(k); c=c+abs
    (PilotSoft(k));
end
IRSOFTp = IRSOFT*Dat_Weight/b + IRSOFTp *(1-Dat_Weight)/c;
IRHard = IRHard*Dat_Weight/a + IRPilotHard*(1-Dat_Weight);
IRSOFT = IRSOFT*Dat_Weight/b + IRPilotHard*(1-Dat_Weight);
%***** acq probability *****
a = IRPilotHard .* conj(IRPilotHard);
for k=1:size(h1,2), [n,m]=max(a);h2(k)=m;a(m)=0;end
c=0; for k=1:size(h1,2), for n=1:size(h1,2)
    if(h2(k)==h1(n)), c=c+1; h2(k)=0; end
end, end
AErrNoDFB = size(h1,2)-c;
a = IRHard .* conj(IRHard);
for k=1:size(h1,2), [n,m]=max(a);h2(k)=m;a(m)=0;end
c=0; for k=1:size(h1,2), for n=1:size(h1,2)
    if(h2(k)==h1(n)), c=c+1; h2(k)=0; end
end, end
AErrHardDFB = size(h1,2)-c;
a = IRSOFT .* conj(IRSOFT);
for k=1:size(h1,2), [n,m]=max(a);h2(k)=m;a(m)=0;end
c=0; for k=1:size(h1,2), for n=1:size(h1,2)
    if(h1(k)==h1(n)), c=c+1; h2(k)=0; end
end, end
AErrSoftDFB = size(h1,2)-c;
a = IRSOFTp .* conj(IRSOFTp);
for k=1:size(h1,2), [n,m]=max(a);h2(k)=m;a(m)=0;end
c=0; for k=1:size(h1,2), for n=1:size(h1,2)
    if(h2(k)==h1(n)), c=c+1; h2(k)=0; end
end, end
AErrSoftPDFB = size(h1,2)-c;
AcqError(kkk,:)=AcqError(kkk,:)+...
    [AErrNoDFB,AErrHardDFB, AErrSoftDFB, AErrSoftPDFB]
    end % nnn
end % kkk

```

## CLAIMS:

1. A method of channel estimation in a cellular communication system in which symbols are transmitted between a mobile station and a base station, the method comprising:

receiving via a communication channel an incoming signal;  
providing a first estimate for the channel impulse response of that communication channel and utilising that first estimate to process the incoming signal to generate an estimated data symbol;

using said estimated data symbol to generate a soft output feedback decision; and

using the soft output feedback decision to make a further estimate of the channel impulse response.

2. A method according to claim 1, wherein the incoming signal incorporates symbols spread by a spreading code in a CDMA system.

3. A method according to claim 2, wherein the channel impulse response is estimated by performing a correlation process between a conjugate version of the spreading code and the incoming signal, and multiplying the results of that process by the soft feedback decision value as a weighting value for the channel impulse response.

4. A method according to any preceding claim, wherein the incoming signal includes data symbols and pilot symbols, a unique spreading code having been used respectively for pilot symbols and data symbols.

5. A method according to claim 2 or 4, in which a long spreading code has additionally been used to spread the symbols prior to transmission.

6. A method of channel estimation in a cellular communication system in which symbols are transmitted between a mobile station and a base station, the method comprising:

receiving via a communication channel an incoming signal which incorporates symbols spread by a spreading code;

providing a first estimate for the channel impulse response of that communication channel and utilising that first estimate to process the incoming signal to generate an estimated data symbol;

making a further estimate of the channel impulse response by performing a correlation process between a conjugate version of the spreading code and the incoming signal, and multiplying the results of that process by a feedback decision based on said estimated data symbol as a weighting value for the channel impulse response.

7. A method according to claim 6, wherein the feedback decision is a soft output.

8. A method according to claim 6, wherein the feedback decision is a hard output.

9. Circuitry for estimating a channel impulse response in a cellular communication system in which symbols are transmitted between a mobile station and a base station, the circuitry comprising:

a receiver for receiving via a communication channel an incoming signal which incorporates symbols spread by a spreading code;

a channel impulse response generator for providing a first estimate for the channel impulse response of that communication channel;

a data symbol generator for generating an estimated data symbol using the first estimate of the channel impulse response;

circuitry for providing a further estimate of the channel impulse response by performing a correlation process between a conjugate version of the spreading code and the incoming signal, and multiplying the results of that process by a feedback decision based on said estimated data symbol as a weighting value for the further estimate of the channel impulse response.



10. Circuitry for estimating a channel in a cellular communication system in which symbols are transmitted between a mobile station and a base station, the circuitry comprising:

a receiver for receiving an incoming signal via a communication channel;

a channel impulse response generator for providing a first estimate for the channel impulse response of that communication channel;

a data symbols generator for generating an estimated data symbol using that first estimate;

a soft output feedback decision generator for using said estimated data symbol to generate a soft output feedback decision;

wherein the soft output feedback decision is used to make a further estimate of the channel impulse response.

1 / 4

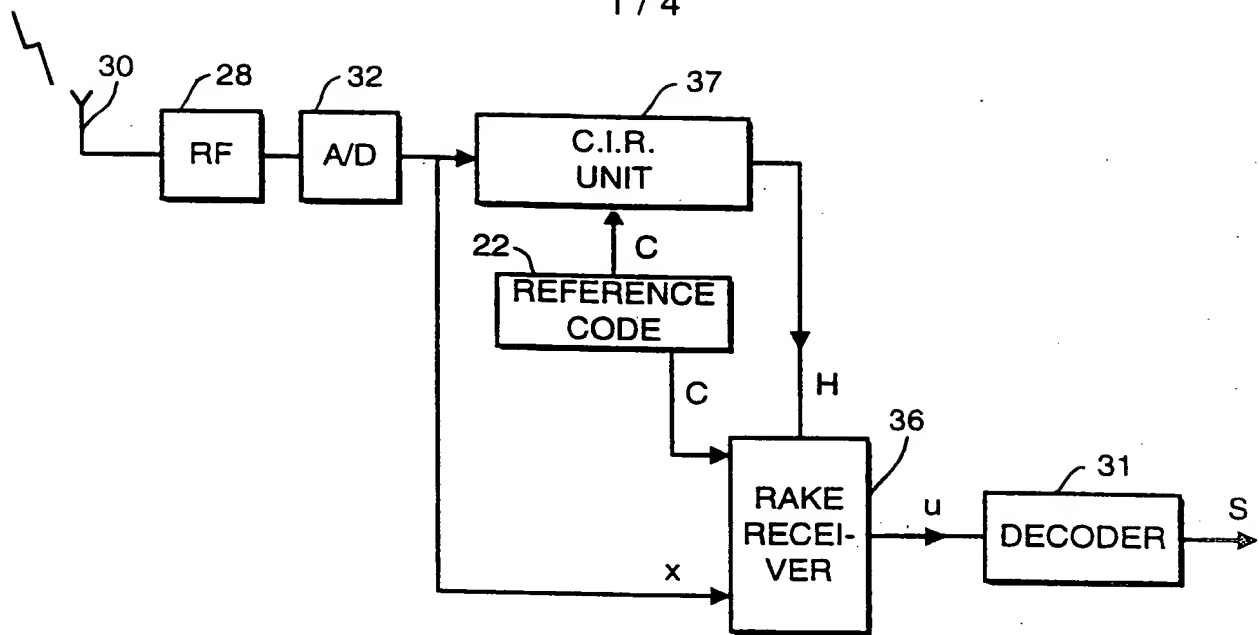


FIG.1

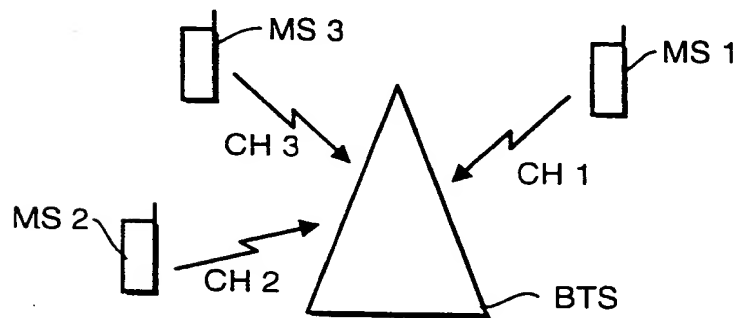


FIG.2

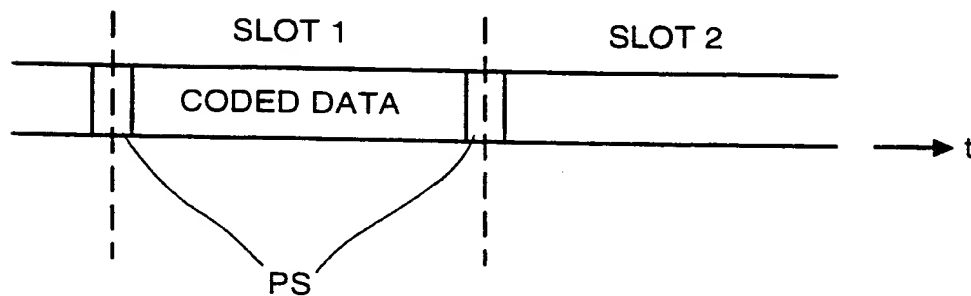


FIG.3

2 / 4

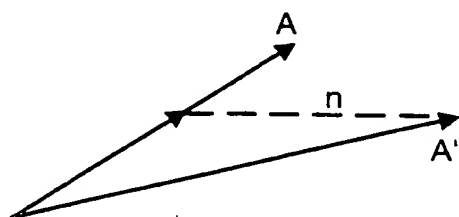
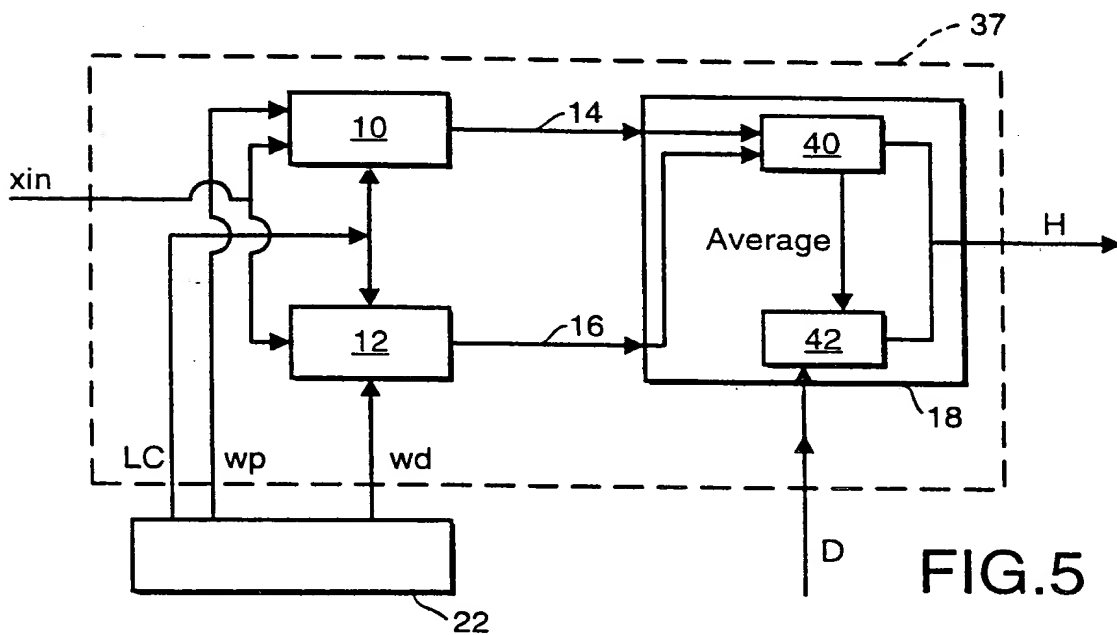
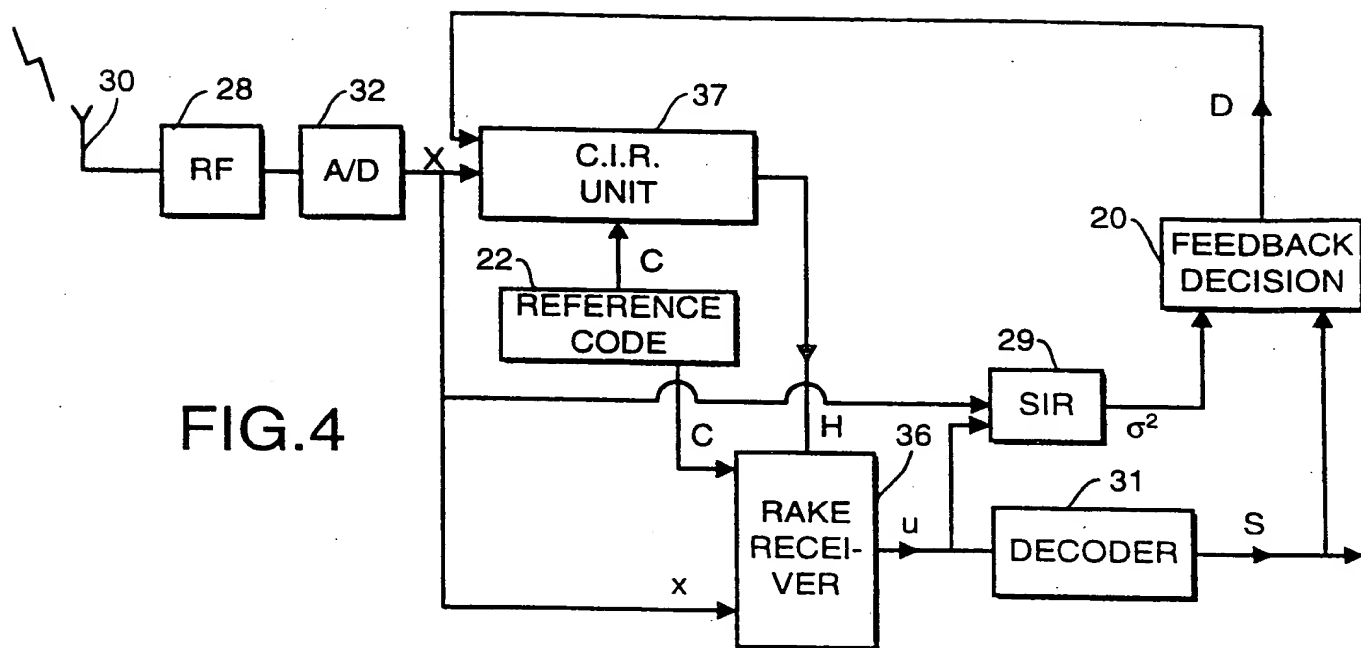


FIG. 6

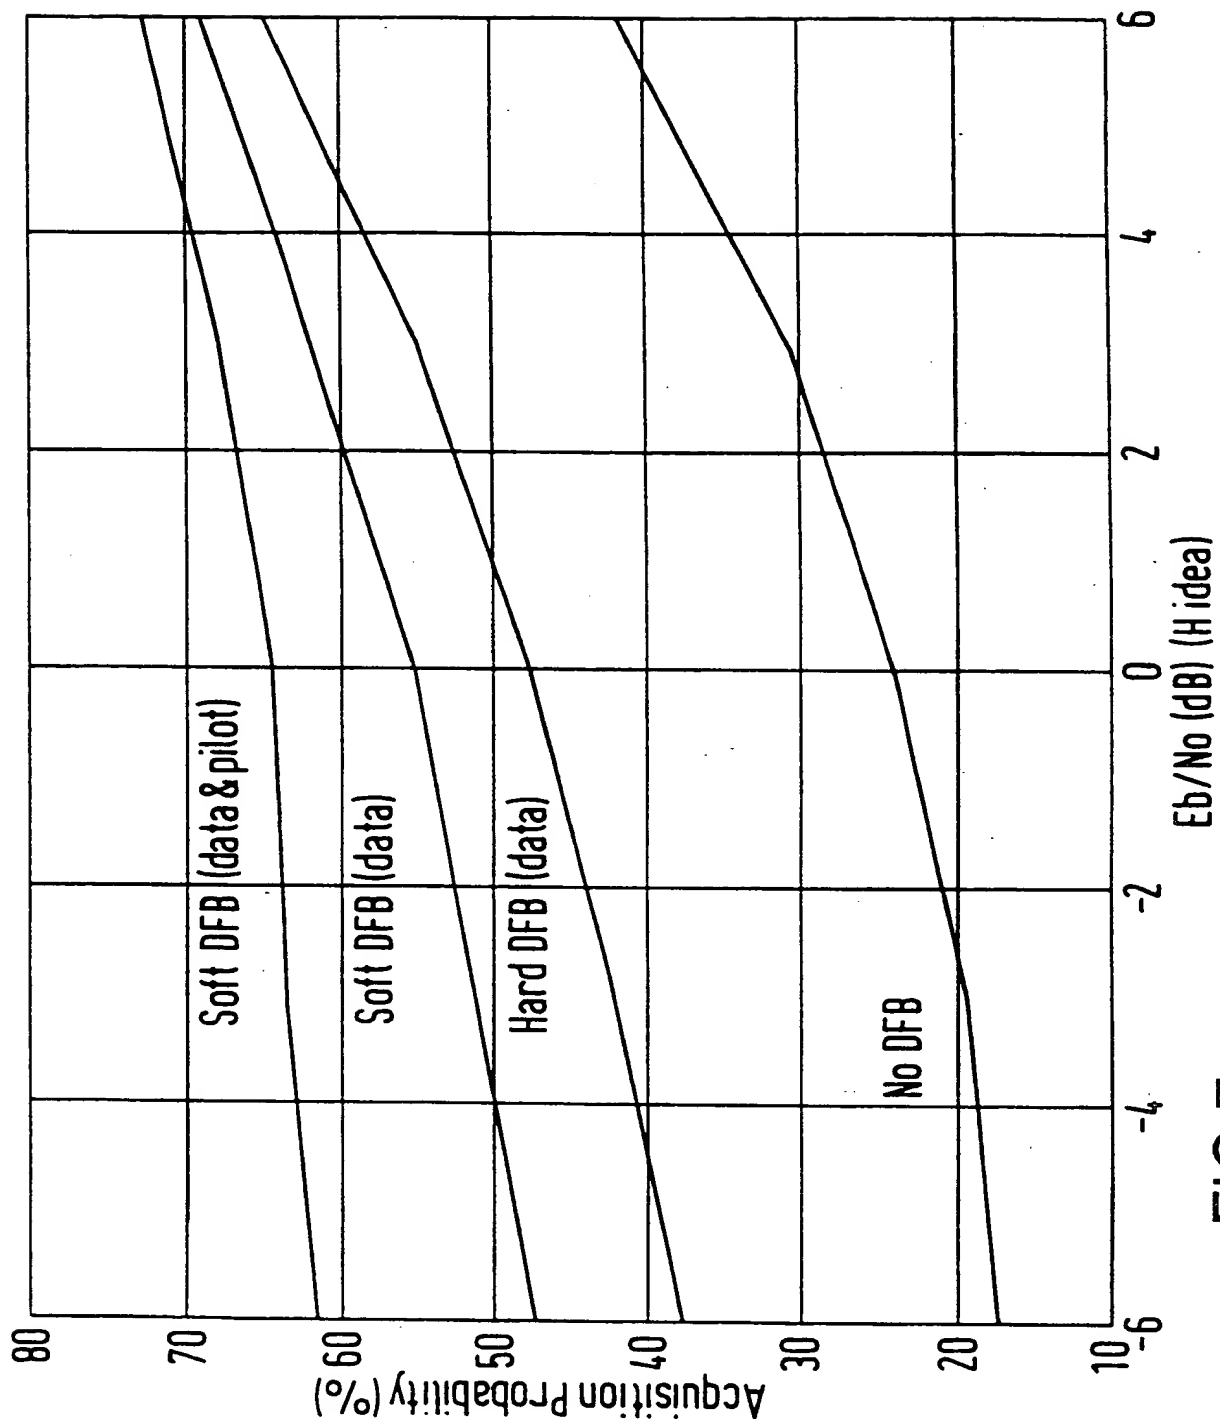


FIG.7

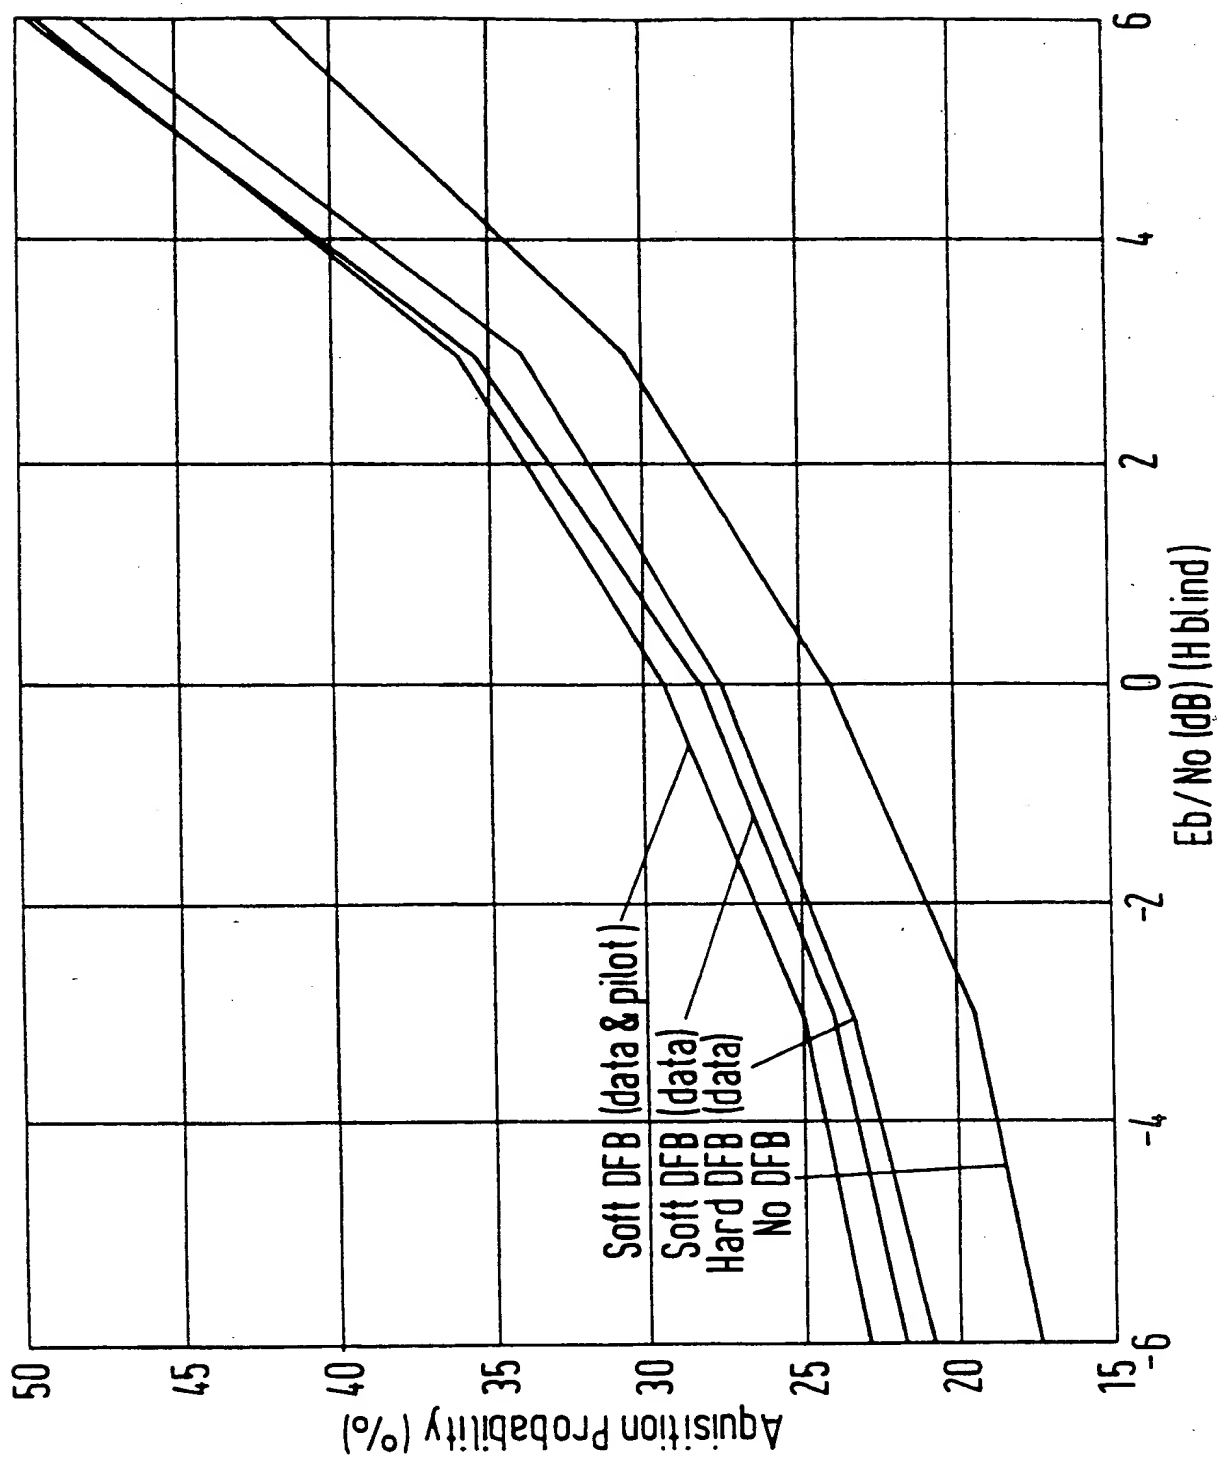


FIG.8

# INTERNATIONAL SEARCH REPORT

Inter      nal Application No

PCT/EP 98/06992

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6    H04B7/005    H04L25/03

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6    H04B    H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>YOW-JONG LIU ET AL: "A SOFT-OUTPUT BIDIRECTIONAL DECISION FEEDBACK EQUALIZATION TECHNIQUE FOR TDMA CELLULAR RADIO" IEEE JOURNAL ON SELECTED AREAS IN COMMUNICATIONS, vol. 11, no. 7, 1 September 1993, pages 1034-1045, XP000400013 see page 1035, left-hand column, line 3 - page 1036, left-hand column, line 9; figure 1 see page 1040, right-hand column, line 22 - page 1041, left-hand column, line 9; figure 16</p> <p style="text-align: center;">--- -/--</p>	1, 2, 10

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

9 June 1999

Date of mailing of the international search report

23/06/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Burghardt, G

# INTERNATIONAL SEARCH REPORT

Inter nal Application No

PCT/EP 98/06992

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 732 114 A (THEBAULT BERTRAND ET AL) 24 March 1998 see column 1, line 16 - column 2, line 26 see column 3, line 29 - line 67 ---	3,6,9
A	EP 0 339 349 A (TELETTRA LAB TELEFON) 2 November 1989 see page 6, line 46 - line 58; figure 1 -----	3,6,9

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/EP 98/06992

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5732114	A	24-03-1998	FR 2726711 A	10-05-1996
			EP 0711049 A	08-05-1996
EP 0339349	A	02-11-1989	NONE	